


Logical function


2AND-OR



Input	Data type	Description
I1	BOOL	AND1-Input
I2	BOOL	AND1-Input
J1	BOOL	AND2-Input
J2	BOOL	AND2-Input
Output	Data type	Explanation
Q	BOOL	(I1 AND I2) OR (J1 AND J2)

Truth table

I1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
I2	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
J1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
J2	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Q	0	0	0	1	0	0	0	1	0	0	0	1	1	1	1	1

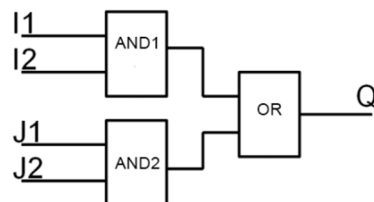

Devices	PR110, PR114, PR200
Version	1.0
Last modification	27.02.2015